




PRODUCTION ULTRASONIC FILM SPLICER

MICROFILM EQUIPMENT

NO CONSUMABLES.
QUICK AND SIMPLE TO
USE, GIVES ARCHIVAL
SPLICES, IDEALLY
SUITED FOR EDITING,
JACKETING AND
DUPLICATION.

Production ultrasonic splicer
producing fast quality splices. Simple
to use and requires no consumables
the Solar Ultrasonic 16/35 splicer is
suitable for both 16mm and 35mm
microfilm

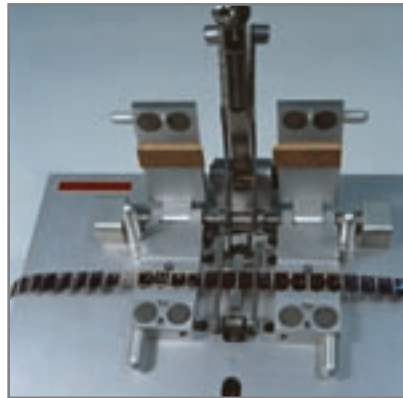

Specifications

Film formats

Silver Halide, diazo or vesicular films
cartridge and processor leaders,
different thicknesses of film

Operation

Mains on/off switch, push button for
splice, push button for inspection area
lamp on/off

Splicing time

1 Sec

Joining section

Quarter - turn clamping handle, film
stop adjuster for varying thickness of
film, smooth sliding action film clamps
remaining 'in line' at all stages

Cutting section

Two film - cutter blades, illuminated
surface below cutter blocks, 16/35
integral film clamps, accidental film
cutting protection

Inspection area

108 x 158mm illuminated opal acrylic
film inspection area in line with film
path, acrylic surface removable for easy
lamp change (6' inch fluorescent tube)

Non interference

CE approved

Power

110Vac or 230Vac 50 Hz 500W,
external fuse, 6.3A(T)

Dimensions

470mm wide, 220mm depth, 163mm
max height of work surface

Weight

8 Kgs

Specifications are subject to change



1 Laser Quay, Culpeper Close, Medway City Estate, Rochester, Kent
ME2 4HU. Tel: +44 (0)1634 290099 Fax: +44 (0)1634 290110
Email: mail@solar-imaging.com

For more products visit: www.solar-imaging.com